







Size: DN 40 to 500

Ends: PN10/16 RF Flanged

Min Temperature: -10°C
Max Temperature: +70°C
Max Pressure: 10 Bars
Specifications: Ball type

Vertical or horizontal position

Removable bonnet

Materials: Ductile Iron EN GJS-400-15




SPECIFICATIONS:

- Ball type
- Vertical with ascendant fluid or horizontal (respect the flow direction indicated by the arrow)
- PN10/16 RF Flanged up to DN150, PN10 over
- Removable bonnet for easy maintenance
- Anti-corrosion epoxy painting RAL 5017 blue color 150 microns thickness
- Anti-corrosion stainless steel bolting
- Aluminium or ductile iron NBR coated ball non floating
- Full bore
- Minimum backpressure for tightness between 0.3 and 0.5 bars

USE:

Water distribution and watering
 Min Temperature Ts: -10°C
 Max Temperature Ts:+70°C
 Max Pressure Ps: 10 bars

HEAD LOSS:

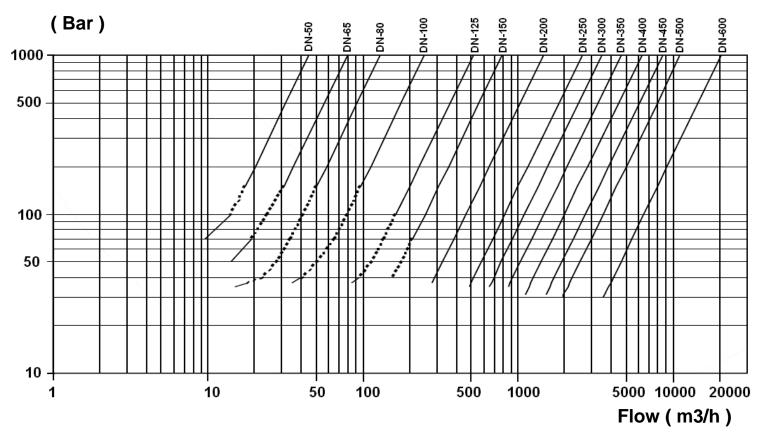

FLOW COEFFICIENT Kvs (in m3/h):

| DN | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |
|------------|----|----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| Kvs (m3/h) | 60 | 81 | 130 | 255 | 400 | 645 | 970 | 2000 | 3050 | 4150 | 5100 | 6600 | 7500 | 9700 |


Date : 03/19 Rev.08
Page 2 sur 7




RANGE:

PN10/16 RF Flanged from DN40 to 150 and PN10 over Ref. 336 DN40 to 500

MATERIALS:

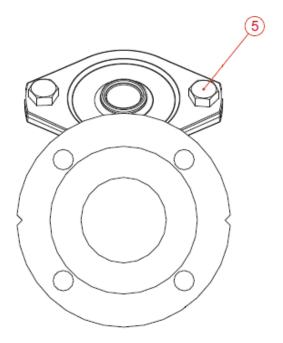


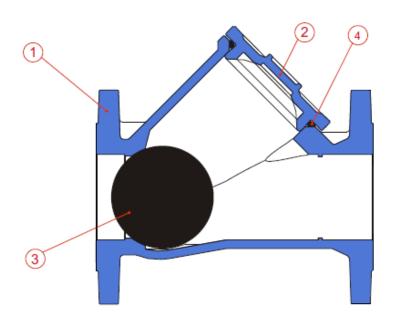


| Item | Designation | Materials | | | | | | |
|------|--------------------|----------------------------------|--|--|--|--|--|--|
| 1 | Body | Ductile iron EN GJS-400-15 | | | | | | |
| 2 | Bonnet | Ductile iron EN GJS-400-15 | | | | | | |
| 3 | Ball DN 40 to 200 | Aluminium + NBR | | | | | | |
| | Ball DN 250 to 500 | Ductile iron EN GJS-400-15 + NBR | | | | | | |
| 4 | Bonnet gasket | NBR | | | | | | |
| 5 | Bolting | SS A-2 | | | | | | |



SIZE (in mm):

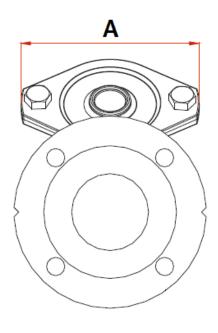

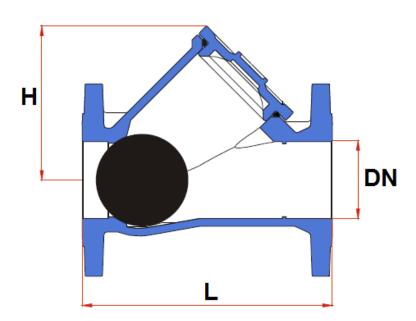


| DN | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |
|-------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|------|
| L | 180 | 200 | 240 | 260 | 300 | 350 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 |
| Н | 90 | 115 | 135 | 160 | 190 | 222 | 268 | 335 | 420 | 495 | 580 | 730 | 760 | 900 |
| Α | 120 | 140 | 155 | 185 | 220 | 255 | 290 | 370 | 380 | 445 | 520 | 712 | 712 | 775 |
| Weight (Kg) | 6 | 8 | 12 | 15 | 21.5 | 29 | 45 | 85 | 120 | 180 | 270 | 440 | 500 | 680 |

Date : 03/19 Rev.08
Page 4 sur 7



FLANGES SIZE (in mm):

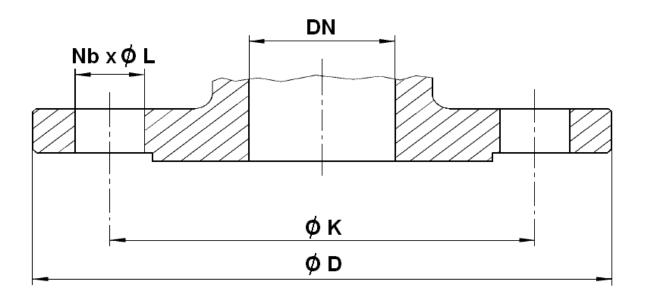


| DN | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 |
|----------|--------|--------|-------|--------|--------|--------|--------|--------|---------|---------|---------|---------|---------|---------|
| Ø D | 150 | 165 | 185 | 200 | 226 | 253 | 285 | 342 | 403 | 450 | 505 | 565 | 615 | 670 |
| øк | 110 | 125 | 145 | 160 | 180 | 210 | 240 | 295 | 350 | 400 | 460 | 515 | 565 | 620 |
| Nb x Ø L | 4 x 19 | 4 x 19 | 4 x 1 | 8 x 19 | 8 x 19 | 8 x 19 | 8 x 23 | 8 x 23 | 12 x 23 | 12 x 23 | 16 x 23 | 16 x 27 | 20 x 27 | 20 x 27 |



STANDARDS:

- Fabrication according to ISO 9001: 2015 and ISO 14001: 2015
- DIRECTIVE 2014/68/EU: Products excluded from directive (Article 1, § 2b)
- Tests according to ISO 5208, Rate A
- PN10 Flanged according to EN 1092-2
- Length according to EN 558 series 48 (DIN 3202 F6)
- According to water pumping stations NF EN 12050-4

INSTALLATION POSITIONS:

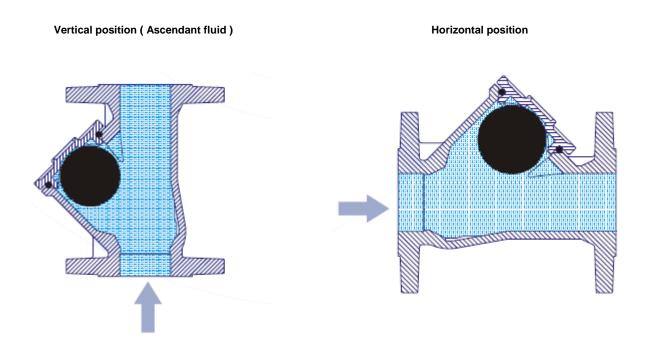

ADVICE : Our opinion and our advice are not guaranteed and Lauridsen group shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.



INSTALLATION INSTRUCTIONS

GENERAL GUIDELINES:

- Ensure that the check valves to be used are appropriate for the conditions of the installation (type of fluid, pressure and temperature).
- Be sure to have enough valves to be able to isolate the sections of piping as well as the appropriate equipment for maintenance and repair.
- Ensure that the valves to be installed are of correct strenght to be able to support the capacity of their usage.

INSTALLATION INSTRUCTIONS:

- Before installing the check valves, clean and remove any objects from the pipes (in particular bits of sealing and metal) which could obstruct and block the valves.
- Ensure that both connecting pipes either side of the check valve (upstream and downstream) are aligned (if they're not, the valves may not work correctly).
- Make sure that the two sections of the pipe (upstream and downstream) match, the check valve unit
 will not absorb any gaps. Any distortions in the pipes may affect the thightness of the
 connection, the working of the check valve and can even cause a rupture. To be sure, place the kit in
 position to ensure the assembling will work.
- If sections of piping do not have their final support in place, they should be temporarily fixed. This is to avoid unnecessary strain on the check valve.
- If there is a direction changing or if there's another material, it's better to take away the check valve so that it is outside the turbulence area (**between 3 and 5 times the ND before and after**).
- After a pump please refer to FD CEN/TR 13932 to install the check valve :
 - If it is essential to keep priming the pump, a non-return check valve can be fitted to the suction pipe at a distance L1 (straight length suction) > 10xD1 (diameter suction)
 - The check valve is designed to meet the maximum flow rate in service
 - In other cases, the non-return check valve is mounted on the discharge pipe at a distance of L2 (straight length at discharge) > 3xD2 (diameter at discharge)

Date : 03/19 Rev.08 Page 7 sur 7