


BA 90/3 Code: 002509

Convenient handle High quality for easy transport & stainless steel body rope installation

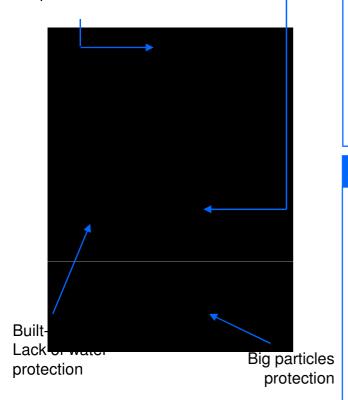

TECHNICAL CHARACTERITICS

- ✓ Power: 950 watts
- ✓ Max. flow: 6,3 m3 / hour
- ✓ Max. pressure: 3,4 bar
- ✓ Max. height installation: 10 m
- ✓ Max. submersion height: 7 m
- ✓ Intensity:4,3 A
- ✓ Pump diameter: 157 mm✓ Outlet diameter: M 1" 1/4
- ✓ Weight: 8,5 kg
- ✓ Electric wire: 10 m
- ✓ Max. fluid temperature: 35°C

KEY POINTS

Well or rainwater submersible pump. Perfect for manual watering or water tansfer.

- High quality stainless steel body and engine.
- Lack of water protection and big particles protection.

Perfect between 2 to 10 meters depth (3 watering devices capacity).

ACCESSOIRIES ACCESSOIRIES		
INCLUDED	NOT INCLUDED	
 Elbow fitting F1" 1/4 – Ø 30 mm Elbow fitting F1" 1/4 – M 1" Fluted fitting F1" Ø30 or Ø25 M 3/4" Suspension rope 10m 	 005632: PE pipe Ø32 408320: Plastic fitting Ø32 - 1" OR 005125: PVC pipe Ø int 25 (max. pressure 4 bar). 	J