

**STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100**



**ISO 9001 : 2015**



**Size :** Diameter 100  
**Ends :** Male BSP  
**Min Temperature :** + 0°C ( Ambient -20°C )  
**Max Temperature :** + 100°C ( Ambient +60°C )  
**Pressure :** From -1 to 60 Bars  
**Specifications :** All stainless steel  
Stainless steel mechanism  
Dry dial ( to be fitted in )  
Safety glass

**Materials :** AISI 304

## STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100

### SPECIFICATIONS :

- All stainless steel
- Stainless steel mechanism
- Dry dial ( to be fitted in )
- Safety glass
- 1 class
- Protection IP65
- Bottom connection BSP threaded
- With vent security

### USE :

- Not for viscous or crystallizing liquid
- Min and max Temperature Ts : 0°C to +100°C ( ambience -20°C à + 60°C )

### RANGE :

- All stainless steel pressure gauge with dry dial Ø 100 with bottom BSP 1/2" male connection, range -1/+1 to 0/60 bars **Ref. 1617**

### ACCESSORIES :



- SS curl PN20 Male / Female BSP  
○ DN 1/2" **Ref. 9880208**



- 250 ml glycerine bottle **Ref. 9880401**

**STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100**
**GRADUATIONS :**


Range (bar)	Graduation (bar)
-1 / +1	0,05
0 / 1,6	0.02
0 / 2,5	0.05
0 / 4	0,1
0 / 6	0,1
0 / 10	0,2
0 / 16	0,2
0 / 25	0,5
0 / 40	1
0 / 60	1

**MATERIALS :**

DESIGNATION	MATERIALS
Box	AISI 304
Fitting	AISI 316
Mechanism	AISI 316
Dial	Aluminium
Glass	Safety glass
Needle	Aluminium

**STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100**

SIZE ( in mm ):

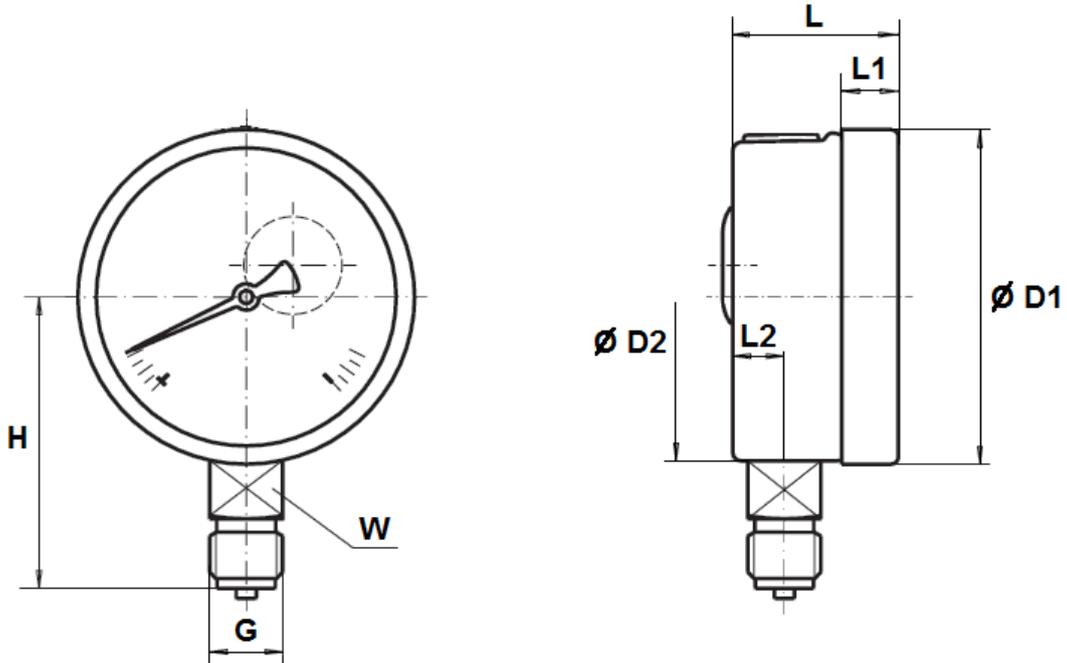

DN	100
Ø D1	100.8
Ø D2	99
H	90
G	1/2" BSP
L	48
L1	14
L2	16
W	22
Weight ( Kg )	0.500

**STAINLESS STEEL PRESSURE GAUGE WITH DRY DIAL Ø 100**

**STANDARDS :**

- Fabrication according to ISO 9001 : 2015
- Designing according to EN 837-1
- DIRECTIVE 2014/68/EU : Products excluded from directive ( article 4, § 3 )
- Threaded male BSP cylindrical ends according to ISO 228-1

**ADVICE :** Our opinion and our advice are not guaranteed and Lauridsen group shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.