MAIN CHARACTERISTICS



AVAILABLE MODELS




LIMITS OF USE

Max allowed fluid pressure : PS	
Max allowed fluid temperature TS :	
Use on saturated steam	





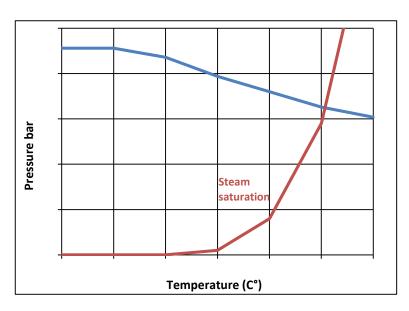



REGULATIONS AND STANDARD OF CONSTRUCTION


Item	Standard		


DIMENSIONS (mm) AND WEIGHT (kg)

DN	A (Flanges)	К	В	B1	С	D (thread)	Drillings Nbr.	Weight (Kg) (flanges)	Weight (Kg) (theard)










CONSTRUCTION

N°	Item	Material	2 8 7 3 4
1			
2			
3			
4			
5			
6			
7	K		
8			6

1


FLOWRATE OF CONDENSATE (Kg/h)

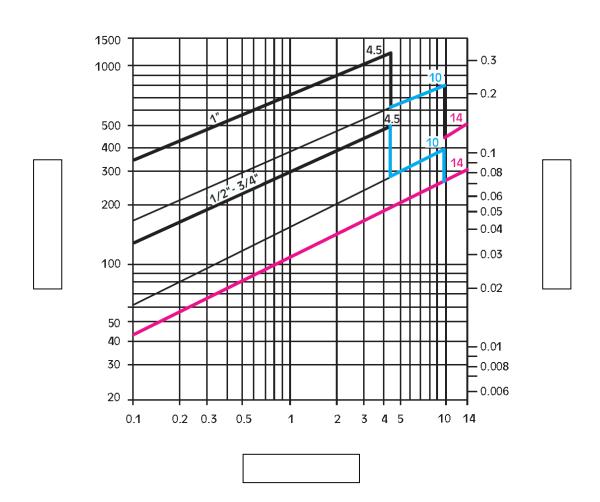

INSTALLATION

MOUNTING

Flanges PN16 Dimensions						
DN	D	К	L	Qty	ø	



MAINTENANCE